


WHITEPAPER

# Inclining guide

Securing safety and stability

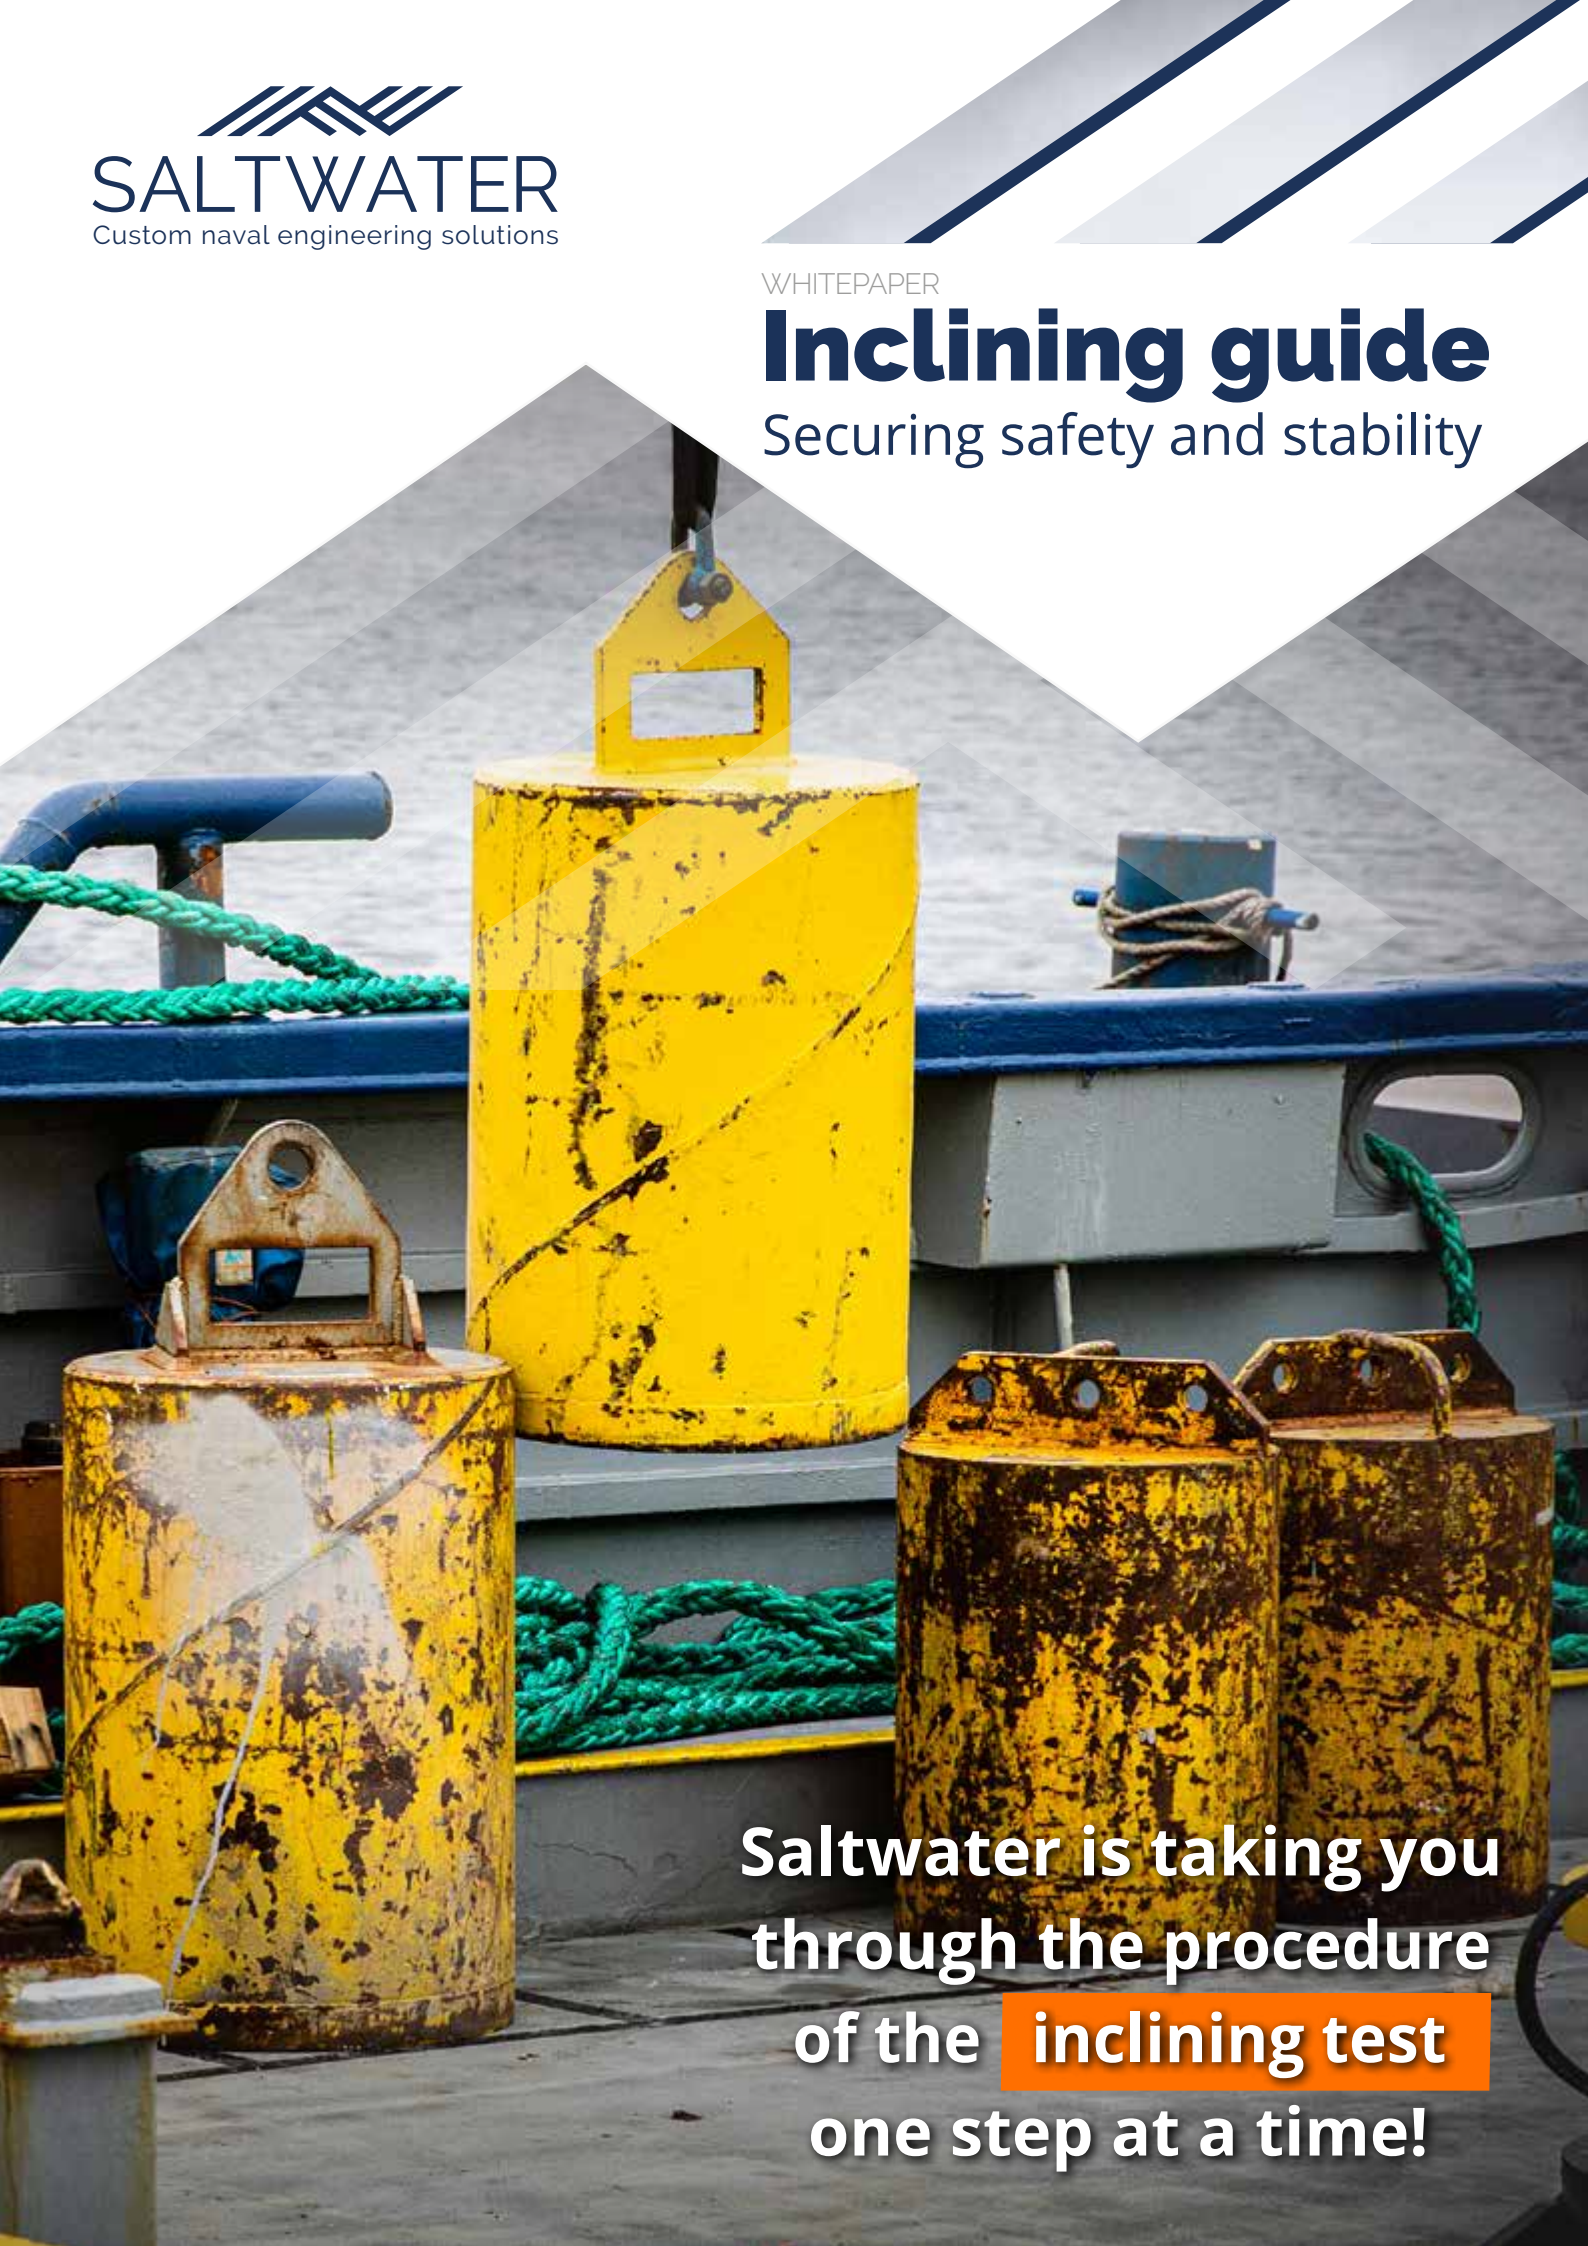

Saltwater is taking you  
through the procedure  
of the **inclining test**  
one step at a time!

# Contents

- 3** Why incline?
- 4** The importance of stability
- 5** Eureka!
- 6** Defining responsibilities
- 7** Rules & regulations
- 8** Inclining theory
- 9** Inclining - step by step
- 12** Do the check, take the test!
- 13** On-site works
- 14** About us

## Colophon | Whitepaper Inclining

Date of issue September 2021

### Contact

Saltwater Engineering B.V.  
Buitendijks 33  
3356DB Papendrecht  
T +31(0)78-205 15 00  
E [info@saltwater.nl](mailto:info@saltwater.nl)  
W [www.saltwater.nl](http://www.saltwater.nl)

### Illustration 'Eureka!'

Ferry van Steijn



# Why incline?

Every vessel will require in its lifetime of service one or more inclining tests. The main purpose of this test is to determine if the combination of the center of gravity and lightweight is within the allowable limits for sufficient stability. Depending on the purpose and intended use of the vessel an inclining test is required only once, on a regular basis (f.e. Class renewal), or following an extensive refit or conversion. Regardless of the grounds for the inclining test, the procedure for the actual test is identical.

This whitepaper is intended for vessel owners, operators, or anyone with an interest in the theory to provide a better understanding of why, how, and when an inclining test is prepared and executed.



# The importance of stability

One of the most crucial characteristics of a vessel is stability. Stability represents the floating capability under deviating circumstances. The importance of a stable vessel is understood as one comprehends the potential consequences of an unstable vessel. A capsizing vessel, due to loss of stability is a risk to the health and safety of the personnel on board but also poses economic risks due to loss of cargo. Last but not least, a capsizing vessel could also have major environmental consequences.

Numerous accidents in history have demonstrated the importance of a proven stable vessel. Depending on the type of vessel, different rules and regulations regarding stability are required to be complied with. During the vessel's lifetime, stability is continuously monitored, to prove the stability of the vessel.

In doing so, one should start at the center of gravity. This originates from the theoretical design of the vessel (or the planned modification), throughout the build registered and prior to delivery verified. This verification is the starting point to prove that the vessel will have sufficient stability to safely navigate the intended waters. It is therefore essential to accurately determine the center of gravity, this is done by the inclining test method.

Historically speaking, one of the most important mathematicians, related to the determination of a vessel's stability, is Archimedes. He discovered a mathematical theory to determine the floatability of a vessel, the so-called buoyance effect.






# Eureka!

In the first century BC the Roman architect Vitruvius related a story of how Archimedes uncovered fraud in the manufacturing of a golden crown commissioned by Hiero. Suspecting that the goldsmith might have replaced some of the gold given to him by an equal weight of silver, Archimedes discovered that an object displacing water is subjected to an upward force that is equal to the weight of the displaced water.

This investigation leads to the important discovery of buoyancy, the mathematical ability of a vessel to float. Archimedes is considered to be the greatest mathematician of ancient history, and one of the greatest of all time.

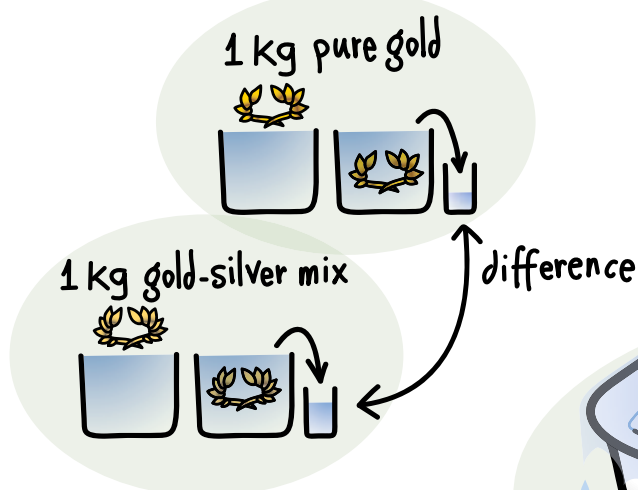

# Rules & regulations


As stated by the International Maritime Organisation (IMO), all passenger vessels and every cargo ship with a length of 24 m and over are required to execute an inclining test. Cargo vessels below 24 m require an inclining test but are subjected to different stability requirements. These depend on the flag state which is selected by the vessel's owner. Refitted vessels whose original lightship weight has been adjusted by  $\geq 2\%$  or whose L.C.G. has been moved by  $\geq 1\%$  of L shall undergo a lightweight survey and an inclining test. Additionally, passenger vessels must undergo a lightweight survey at regular intervals not exceeding five years.

The requirements for the inclination test are given by the IMO and the International Association of Classification Societies (IACS). To regulate the inclination test, flag state as well as a classification society is involved.

Flag State	Classification societies
 <p>INTERNATIONAL MARITIME ORGANIZATION</p> <p>Every vessel is required to be registered to a flag state. The flag states are responsible for setting up the guidelines and maintaining the norms and rules as established by the IMO. Simply put, flag state societies carry out the defined rules and regulations by the IMO. The regulations as enhanced/adapted by the flag state generally involve the following domains:</p> <ul style="list-style-type: none"><li>• Compliance with International standards (IMO)</li><li>• Safety of seafarers (SOLAS)</li><li>• Prevention &amp; protection of the marine environment (MARPOL)</li><li>• Collision Regulations</li><li>• Convention on Load Lines (ICLL)</li></ul> <p>Each flag state has its own adoption on the stated rules and regulations as defined by IMO. Differences for the rules and regulations are found between the domains per flag state which thereby create a competitive market. The vessel owner can select a flag state based on his/her own demands.</p>	 <p>International Association of Classification Societies</p> <p>The IACS founded rules and regulations represent about 90% of the worldwide cargo carrying tonnage and exists of 12 classification societies. On classification domains, IACS is the main technical advisor of the IMO. IACS establishes objectives in relation to the safety of maritime constructions and systems while standardizing the procedures.</p> <p>Classification societies are mainly focused on validating the constructed Maritime objects. The following list displays the tasks that are carried out by the classification societies:</p> <ul style="list-style-type: none"><li>• Setting up Rules and Regulations in relation to design, construction and maintenance.</li><li>• Executes verification upon the defined rules by the classification society.</li><li>• Once the vessel is operational, periodical assessments to validate the compliance with Rules and Regulations are executed.</li><li>• Surveys the building process.</li></ul>

# Defining responsibilities

Prior to the inclining test, several responsibilities will have to be assigned to different parties. The owner is responsible for initiating the lightship weight survey and the inclining test. By contracting an external expert, the owner or the crew of the vessel gets a representative who acts on his behalf. During the inclining test, the owner/crew is present on-site to support the ongoing operations and to act upon any emerging problems. For a better understanding of the responsibilities for each party, an overview is given below.

Owner/crew	Naval architect	Class surveyor
<b>Contacts naval architect Coordinates with the crew</b>	<b>Executes test</b>	<b>Validates test</b>
Initiates inclination test by contacting class surveyor	Prepares the entire procedure prior to the arrival of the class surveyor	Verifies the procedure as well as assessing the results
Contacts naval architect	Executes a weight estimation and investigates corresponding centre of gravity prior to the inclination test	
Executes an overall vessel survey to prepare for the inclination test	Executes deadweight survey	
Empties tanks if required by class Surveyor	Investigates on tank conditions	
Arranges required inclination test weights	Calculation of free surface correction	
Moves vessel to predetermined test location	Draught mark reading	
Assures proper mooring arrangement for the test	Determines location of pendulums	
Provides a dinghy for draft reading	Translates the conducted results to a report	
Submits final report to class surveyor		

# Inclining theory

To get a proper understanding of an inclining test a basic introduction to vessel stability must be given.

A stationary vessel is held upright due to a certain amount of righting lever on both sides. Simply put, the righting lever is a force that wants to push the vessel back toward an upright state if a heel angle is introduced by external effects such as wind, waves, or cargo placement. The amount of righting lever a vessel has is determined by the GM value. A vessel with a low GM value will have a low amount of righting lever and a vessel with a high GM value will have a high amount of righting lever. GM describes the distance between the center of gravity "G" and the metacentric height "M". The metacentric height can be determined analytically, but the center of gravity cannot.

During the inclining test, a naval architect will place pendulums on the vessel and shift a known weight (w) over a known distance (d) to introduce a heeling moment onto the vessel that will in turn, cause the vessel to list to one side (where the targeted list is abt.2°). The pendulums will then allow the naval architect to "read" the angle of heel introduced by this moment through the deflection of the pendulums.

The amount of heel is determined by how much righting lever a vessel has; this is a direct result of the GM value. Therefore, the combination of heel angle and heeling moment will allow the naval architect to calculate the GM value of the vessel. Once the GM value is known, the naval architect can use this to calculate the position of the center of gravity using the metacentric height as a starting point.


$$GM = \frac{w \times d}{W \tan \theta}$$

Heeling moment

The mass of the ship

Heeling angle

WATERLINE

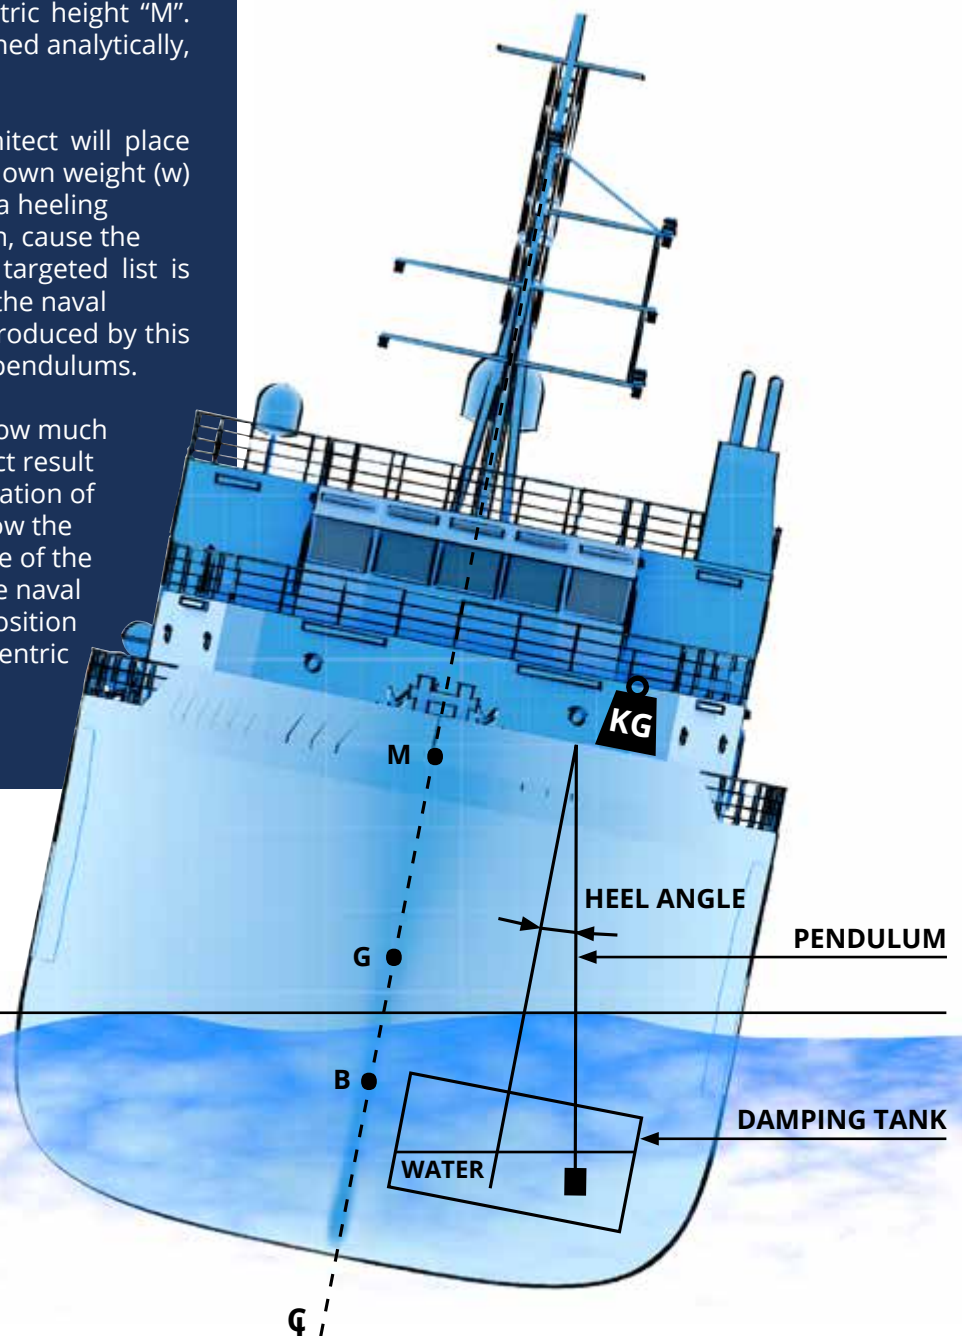

Based on the occurring heeling angles during the test and the deviations of the pendulum, the GM of the vessel can be calculated.



# Inclining - step by step

1.

## Drafting the protocol



### Drafting the protocol

The first step before executing an inclining test is drafting the inclining protocol, this document outlines a couple of key aspects to ensure there are no surprises during the test and is presented to the owner and attending classification society for approval. In a standard protocol, at least the following items will be mentioned:

- Planned location and number of pendulums
- Required testweight, testweight placement and planned weight shifts
- Pre inclination calculation verifying pendulum length and testweight
- Harbour location of the vessel
- Limiting environmental conditions
- Responsibilities during test

This step can be done remotely, based on existing plans of the vessel, therefore it is not required to visit the vessel to prepare for the test.



2.

## Deadweight survey



To derive an accurate inclining test result it is required to complete a deadweight survey, during this survey all the weights on board will be reviewed to determine whether these form part of the lightship or not. If an item is deemed to be no part of the lightship, the item will be logged with its weight and the center of gravity and excluded from the calculation. The maximum amount that can be deducted from the lightship weight is limited to 4% of the lightship weight.



# Inclining - step by step

## 3. Placing pendulums



A minimum of 2 pendulums will be used to measure the deflection of the pendulum during the test. To achieve adequate accuracy in the results, the pendulums should be of sufficient length such that the deflection is a minimum of 15 cm to each side. A dampening tank will be placed under each pendulum and weight will be fitted to the pendulum wire, this weight will be lowered into the fluid to reduce irregular oscillations from external sources other than the heeling moment.



## 4. Tank inspection



Ideally, all tanks should be empty and clean during an inclining test. For vessels in service, it is usually not possible or too costly to empty and clean all tanks. Therefore, the empty tanks should be inspected, and tanks that are full or partially full should be sounded. Preferably the number of tanks containing liquids should be kept to a minimum to reduce free surface effects, and if possible, the tanks should be filled to the overflow pipes.



# Inclining - step by step

## 5. Draft and freeboard reading



Prior to the inclining test, the draft marks will be recorded. This is done to determine the displacement of the vessel but is also required to retrieve the actual trim/heel of the vessel. The displacement value is used to determine the new lightship weight by subtracting the weights recorded in the deadweight survey, the inclining test weights, and the tank fillings. When the inclining test is completed, the drafts will be taken again to ensure the conditions have not changed during the test.



## 6. Execution of inclination test




After completing all the above-mentioned tasks, a total of eight tests, which consists of the additional test weights from their starting position to starboard and portside a heeling moment is introduced to the vessel, this heeling moment will produce a heel angle that can be marked at each pendulum. By shifting the weights in multiple steps the accuracy of the test is increased, usually, eight steps are sufficient to achieve the required accuracy. Upon completion of the test, the heeling moment in relation to the heeling angle shown by the pendulums will be plotted on a graph on-site and presented to the surveyor. If this graph shows a straight line, the test can be deemed successful.





# Do the check, take the test!

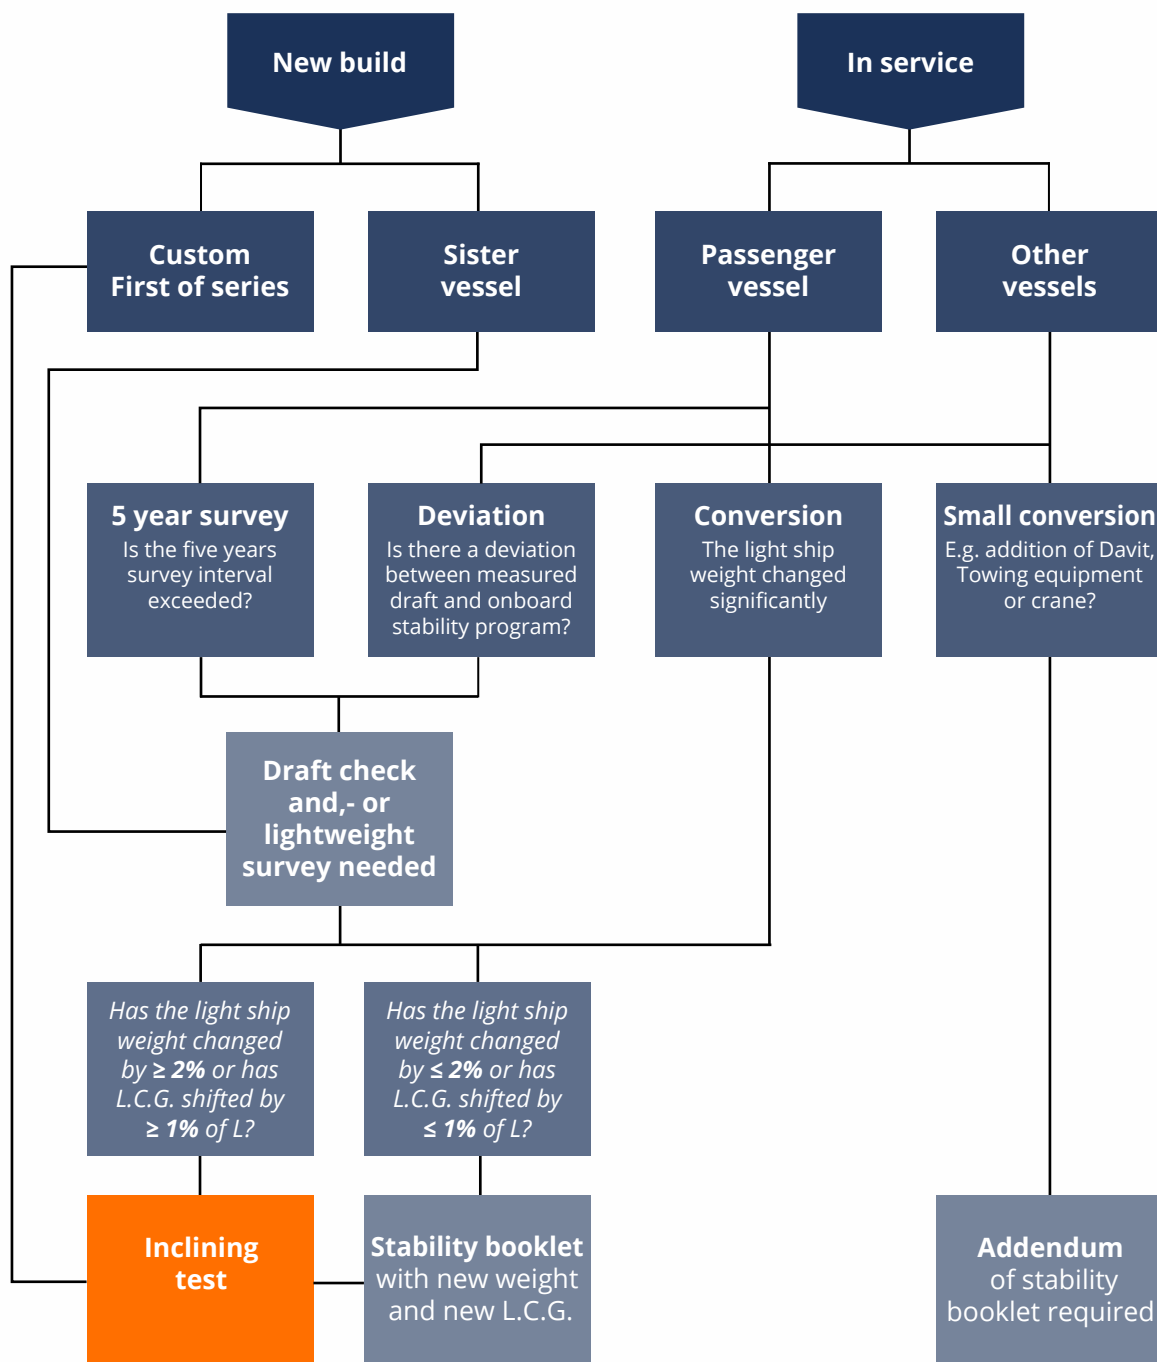

## How can Saltwater help?

Understanding your challenges enables us to deliver practical, quality products and clever solutions. Our team of professional, multi-disciplined engineers helps you to deliver, no matter what the challenge, delivery time, or budget. Saltwater is the flexible partner that complements your business with knowledge, experience, and innovative engineering.



+31(0)78-2051500



info@saltwater.nl



www.saltwater.nl



**Wouter Versteeg**

Inclining specialist



# On-site works



The Vivre-G is one of the standby-, guard vessels of Rederij Groen. The vessel was built in 2004 as a Tuna fishing vessel. Following her introduction in the offshore industry back in 2011, several changes have been made to keep her in top shape for this high demanding market. To keep the stability booklet in pace with the modifications, an inclining test has been carried out to update the lightship weight, center of gravity, and resulting loading conditions.



## Flexibility

Due to the busy and unpredictable work schedule, it was difficult to determine a date when the inclining test was to be performed. The estimated time of arrival at the port changed several times due to few extensions of the vessel's contract. Our team of professionals easily adapted to these ever-changing situations and re-scheduled at each request. Coping with an ever-changing situation is in our DNA, being flexible in these types of work is the best service one can provide to its customers.

The inclining test was carried out during a short-planned maintenance visit to Maaskant Shipyard.

## On-site works

The inclining test entails shifting a series of known weights transverse across the deck when the ship is free to heel. The resulting change in the angle of the heel is measured by the shift of a pendulum and/or an inclinometer. This angle is used to determine the center of gravity. A deadweight survey is executed, drafts are measured following a survey with the assistance of a small boat. Combined with the specific gravity, the temperature of the water, and the hydrostatic data (derived from the shape of the vessel), the mass of the vessel in the water can be determined. Both are procedures that require an eye for detail

for all measurements. Any inaccuracy will influence the test and can greatly affect the outcome of the test which obviously must always be avoided.

## Stability booklet

The results of the above tests are used to calculate the new lightship weight and corresponding center of gravity of the vessel. This data is then used to create a new/ updated stability booklet. Various loading conditions are determined to assure stability under the operating conditions all according to the applicable rules and regulations. With the approval of the stability booklet from the classification society, the captain can operate the vessel safely under the conditions described.

### PROJECT INFORMATION

#### Scope of work

- Deadweight survey
- Inclination test
- New stability booklet

#### Dimensions Vivre-G:

- Length 42,0 m
- Breadth 9,0 m
- Draught 3.5 m



# About us



**“2021 and beyond.  
The best is yet to come!”**

## How it started

Saltwater Engineering was founded in 2007 by four naval engineers. With a small team and a hands-on approach we were able to deliver engineering solutions, fast. Our flexibility, speed and out-of-the-box thinking made us stand out. These traits gave us an edge over incumbents and allowed us to gain a foothold in various markets demanding naval engineering. Over time we have build strong relationships with clients providing us a steady stream of projects to realize organic growth.

## Evolving

Over the years the company has grown; both in revenue and employee count. To sustain year-over-year growth, management has focussed on building an organisation by investing in people, processes and technology.

Moving forward means moving the needle on the way we do business. It requires shifting gears and stepping-up. Bold ambitions demand bold decisions.

We are ready.

These investments have paid off. The company has grown, the number of projects scaled up and a solid foundation has been put in place to enable further growth.

## What sets us apart?

We pride ourselves in being transparent and reliable. These are bold claims that we are staking every day. We communicate loud and clear, we manage expectations, we commit to promises made and we take ownership of a situation when needed.

Sander Broekmeulen - CEO







**SALTWATER**  
Custom naval engineering solutions

Buitendijks 33  
3356 LX Papendrecht  
The Netherlands



**T** +31(0)78-205 15 00  
**E** [info@saltwater.nl](mailto:info@saltwater.nl)  
**W** [www.saltwater.nl](http://www.saltwater.nl)

*Whilst every effort has been made to ensure that the information in this document is correct, Saltwater Engineering will not accept any responsibility for errors or for any consequences as a result.*